

Tuttnauer Medical

PlazMax

◆ P50 ◆ P110 ◆ P160

The Innovative
**Low Temperature
Sterilizer**

for Heat-Sensitive
Equipment



Innovative Energy-Saving Solution



The Tuttnauer Plazmax Line

For highly effective sterile processing in small operating rooms or large Central Sterile Services Departments (CSSD).

Safe | Reliable | Efficient

- Single phase electrical supply for all models lowers operational costs
 - Green technology - non-toxic emissions to the environment
 - Real-time graphical display of cycle parameters
 - Multiple model configurations: manual or vertical with single or double door option
-




Putting your health and wellbeing first.

Smart Design, Smart Technology



Thermal printer and USB port - for printing cycle information and downloading data

Aluminium chamber - aviation grade - homogeneous temperature distribution



Range of capacities to suit different tools and instruments

Advanced human machine interface (HMI)

Highly durable stainless-steel panels - prevents discoloration and easily cleaned



Non-toxic H_2O_2 sterilizing agent



Vertical sliding door and hands-free opening device



Contact us
to learn more about green processing.


Clean Technology



Non-toxic sterilizing agent



No water consumption



Decreased electricity consumption



No toxic residue, only water and oxygen



Using Eco Friendly H_2O_2 sterilizing agent

The PlazMax sterilizer inactivates micro-organisms with Hydrogen Peroxide (H_2O_2) vapor and plasma. It sterilizes medical devices by diffusing H_2O_2 into the chamber and then converting the H_2O_2 molecules into a plasma state.

The sterilization occurs inside the chamber by means of H_2O_2 vapor. The PlazMax utilizes the bacterium killing power of free radicals in the H_2O_2 molecules released by applying heat to the H_2O_2 gas in the vaporizer.

The combined use of H_2O_2 vapor and plasma, safely and quickly sterilizes medical instruments and materials without leaving dangerous residues, thus offering an effective, reliable, economical, and easy sterilization method.

User-Friendly Operation

Sophisticated HMI Touch Screen

- Multi-color display
- Multilingual (26 languages)
- Real-time dynamic graph display (chamber pressure & cycle process)
- Process data display (pressure, temperature, vaporizer temperature)

R.P.C.R Software

Automatic tracking cycle information to your PC (optional). Allows remote monitoring of the sterilizer's operation.



Simple to Operate and Monitor



Thermal printer and USB port



Tracking equipment and maintenance notifications



Diagnostic in/out tests for individual components



Remote-control operating and monitoring



Hands-free opening device and vertical sliding door



Multiple access levels and user passwords

Sterilization Process



Sterilization Cycle and Test Programs

Model	Normal Cycle (Non-hollow loads)	Advanced Cycle (Hollow loads)	Endoscope *
	Cycle Time (min.)	Cycle Time (min.)	Cycle Time (min.)
P50	35	40	32
P110	39	44	37
P160	43	48	41

Test Cycles	Description
	Cycle Time (min.)
Test I	Penetration Test
Test II	Leakage Test

* Endoscope cycle: Short heating time and reduced H₂O₂ exposure time

Note: Cycle times are based on a hot cycle and may vary according to load volume

Types of Loads & Cycles

The PlazMax Line offers regular sterilization cycles for non-hollow loads, advanced sterilization cycles for hollow loads, and a unique endoscope cycle.

Non-Hollow Loads




Electrocautery instruments

Hollow Loads



Surgical power drills

Endoscope Cycles




Rigid scopes for optics




Defibrillator paddles




Shaver handpieces

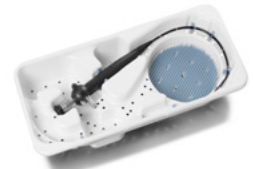

Flexible endoscope

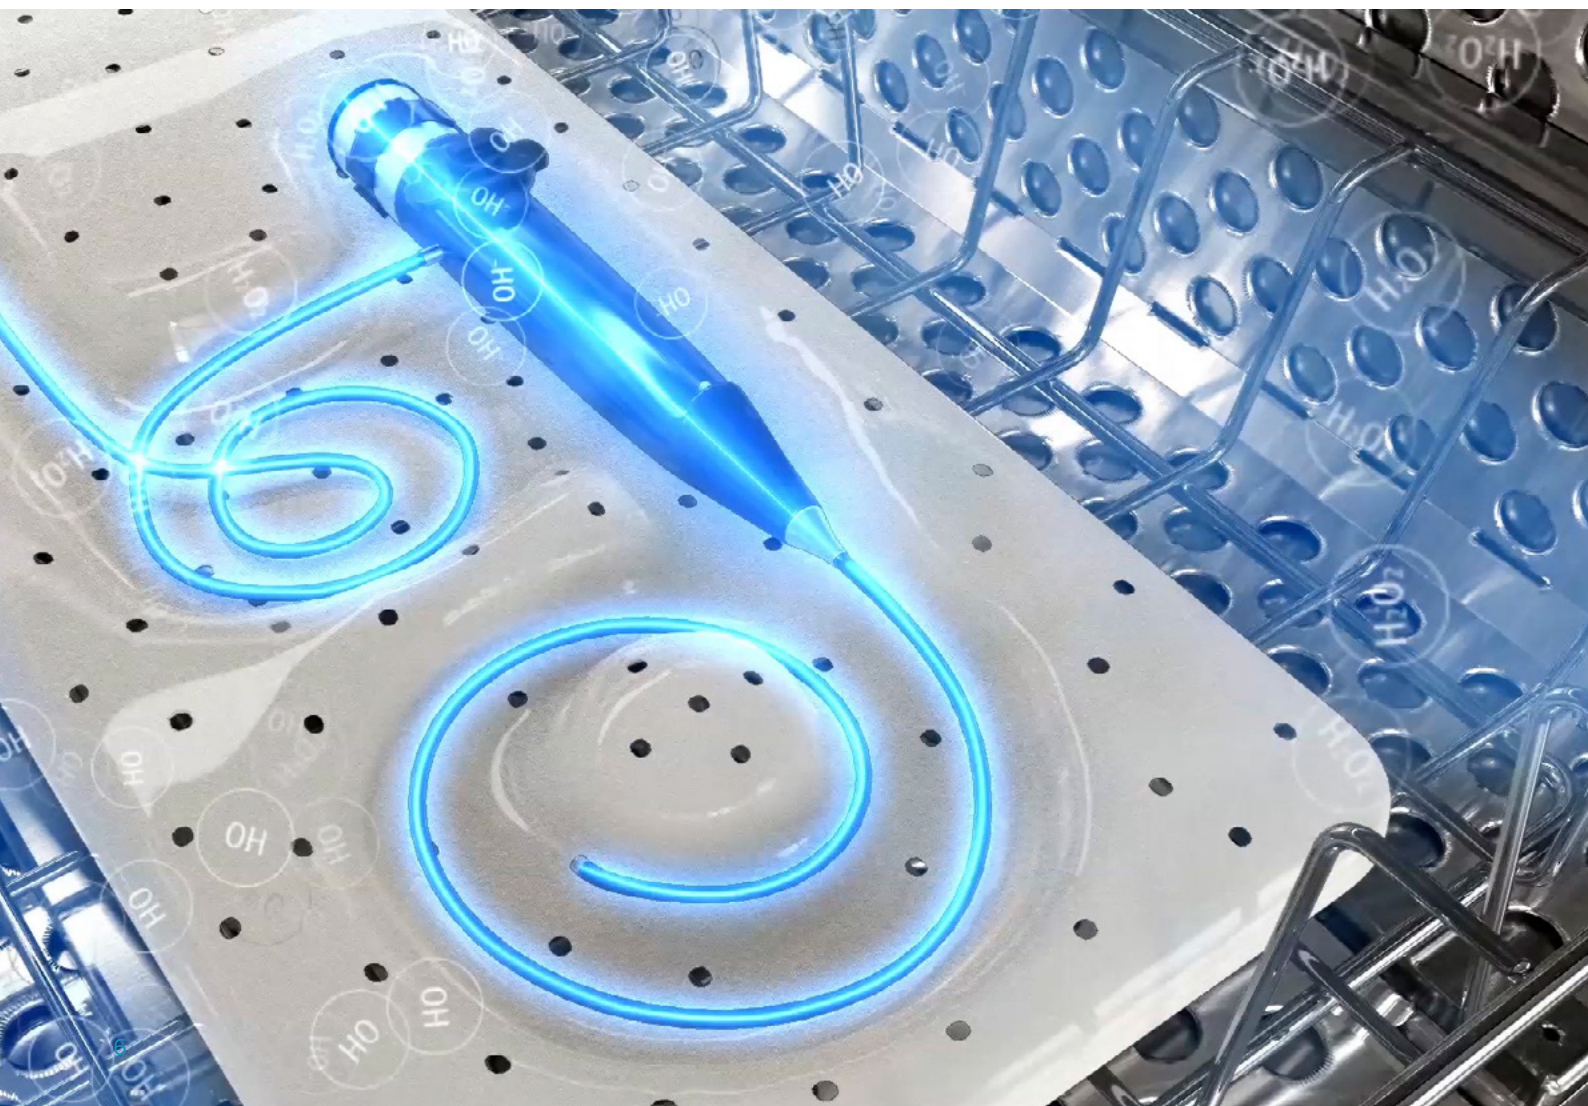

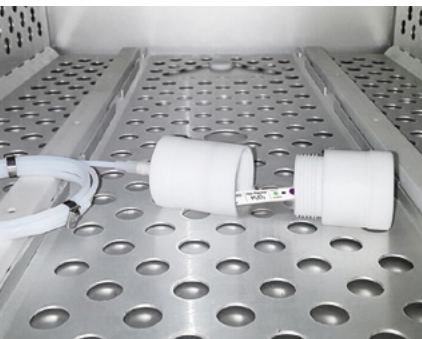

The Tuttnauer PCD Kit

Flexible Endoscope Simulation Kit

Assuring effective penetration and successful sterilization

Our unique PCD kit simulates long and challenging lumen configurations (1mm inner diameter lumen and up to 4m long for double side open ends and 1.4m with one dead-end), to assure complete sterilization penetration with full exposure to the vaporized hydrogen peroxide sterilizing agent.

Comprehensive Tuttnauer Consumables




Chemical Indicators

To be used with every cycle and every packed item, validating penetration and ensuring load contact with the vaporized hydrogen peroxide..



Biological Indicators

To be used according to hospital policies and schedules, validating sterilization efficiency and scope.

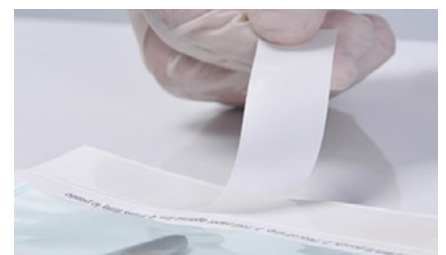

Self-Sealing Pouches


Tuttnauer offers a wide range of sealing and packaging products to support your entire packaging process.

Technical Specifications

Model	Chamber Volume	External Dimensions (WxHxD/D 2-doors) mm	No. of Baskets (WxD cm)	Power (W) Current (A)	Voltage (V) 1-Phase 50-60 Hz
P50	47	702 x 1528 x 729 / 736	1 (40 x 60)	3100 W 13.5 A	230 V
P110	109	702 x 1768 x 729 / 736	2 (40 x 60)	4300 W 18.7 A	230 V
P160	162	702 x 1768 x 1029 / 1036	2 (40 x 90)	4300 W 18.7 A	230 V


PlazMax P50

47 Liter Chamber

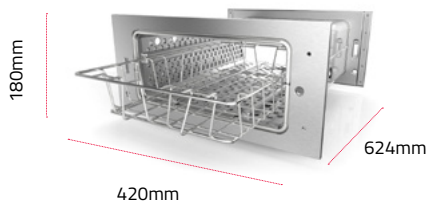


PlazMax P110

109 Liter Chamber

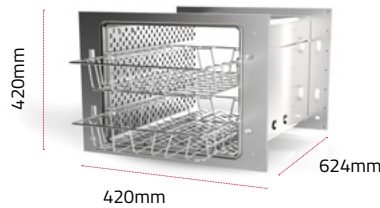

PlazMax P160

162 Liter Chamber

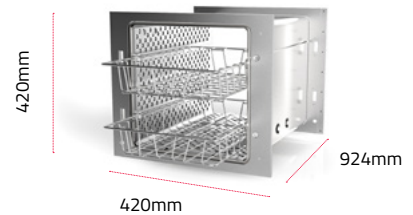

PlazMax - Excellent Quality, Excellent Results

PlazMax complies with strict international standards and directives, to ensure quality and effective sterilization:

- ISO 9001:2015 ▪ ISO 13485:2016 ▪ ISO 14937 ▪ EN 61010-2-040:2015 ▪ EN 60601-1:2006/AC:2010 Medical Device Directive 93/42/EEC

The PlazMax Sterilization Line can be used for applications and instruments that are suitable for plasma sterilization, as per manufacturer's guidelines.

International Sales and Marketing

E-mail: info@tuttnauer.com
www.tuttnauer.com

Tuttnauer Europe b.v.

Hoeksteen 11, 4815 PR
 PO Box 7191, 4800 GD Breda
 The Netherlands
 Tel: +31 765 423 510
 Fax: +31 765 423 540
 E-mail: info@tuttnauer.nl

Tuttnauer USA Co.

25 Power Drive,
 Hauppauge, NY 11788
 Tel: +800 624 5836, +631 737 4850
 Fax: +631 737 0720
 E-mail: info@tuttnauerUSA.com

Distributed by:



Learn from our experts
 Join our blog tuttnauer.com/blog